



1 SSHX 01 ACOUSTIC HOOD

FOR USE IN EX ZONES 1, 2, AND 22

The acoustic hood is used for noise reduction in extremely noisy environments. It ensures a high level of noise insulation and thus allow a clear and understandable communication.




- Acoustic hood made of electrically conductive special plastic
- Suitable for use in Ex zones 1, 2, and 22
- Up to 11 dB noise reduction
- Suitable for use with INDUSTRONIC intercom stations of the DX 0x3, DX 0x4, DX(E) 0x5, and DX(E) 7x5 series

TECHNICAL DATA

Material	Special plastic, electrically conductive
Height x width x depth	870 mm x 705 mm x 520mm (34.25" x 27.76" x 20.47")
Color	Black
Weight	10 kg (22.05 lbs)
Absorption	Max. 11 dB
Ambient temperature	-20 °C to +60 °C (-4 °F to 140 °F)

POLAR DIAGRAM

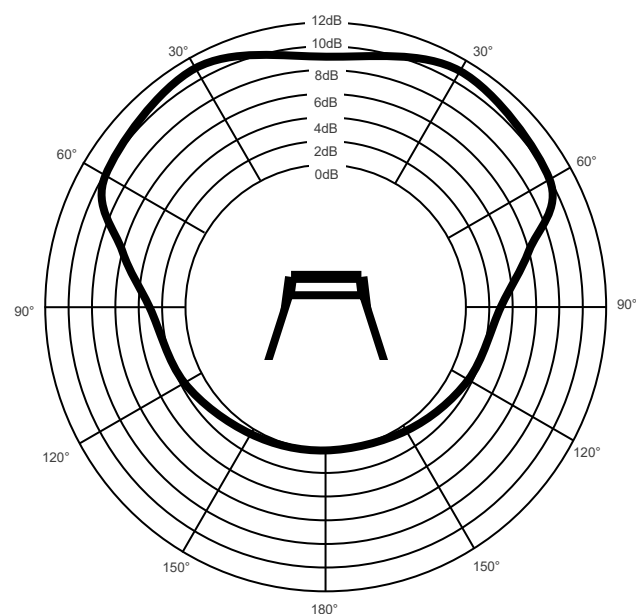

© INDUSTRONIC